



*INNOVATION
DRIVEN BY PASSION*



www.swiftech.com

Introducing the next generation of AIO liquid cooling kits - fully customizable and upgradable while performing at the level of an enthusiast kit.

H220 X²



H240 X²



H320 X²



Drive X2 Series - Technical Specifications

		Radiator	
Material	Brass Tubes, Copper Fins	Brass Tubes, Copper Fins	Brass Tubes, Copper Fins
Body dimensions	127mm x 254mm x 28mm	140mm x 293mm x 28mm	127mm x 375mm x 28mm
Fill-port thread	G1/4	G1/4	G1/4
		Helix™ Fan	
Dimensions	120mm x 120mm x 25mm	140mm x 140mm x 25mm	120mm x 120mm x 25mm
Speed	PWM adjst. 800~1800 RPM	PWM adjst. 700~1800 RPM	PWM adjst. 800~1800 RPM
Airflow	24 ~ 55 CFM	35 ~ 90 CFM	24 ~ 55 CFM
Static pressure	0.53 ~ 2.29 mmH ₂ O	0.25 ~ 2.29 mmH ₂ O	0.53 ~ 2.29 mmH ₂ O
Noise level	<16 ~ <33 dB/A	<8.3 ~ <28.8 dB/A	<16 ~ <33 dB/A
Nominal voltage	12 VDC	12 VDC	12 VDC
Power input	2.4 W	2.4 W	2.4 W
Connector	4-Pin	4-Pin	4-Pin
		Pump	
Speed	PWM adjst. 1200~3000 RPM	PWM adjst. 1200~3000 RPM	PWM adjst. 1200~3000 RPM
Nominal voltage	12 VDC	12 VDC	12 VDC
Power input	6 W	6 W	6 W
Max. static pressure	2.8 mH ₂ O	3.98 mH ₂ O	2.8 mH ₂ O
Max. discharge	11 l/min	2.9 l/min	11 l/min
Connector	SATA	SATA	SATA
MTBF	60,000 Hours	60,000 Hours	60,000 Hours
		Tubing	
Material	PVC	PVC	PVC
Dimensions	5/8" x 3/8" (16 x 10 mm)	5/8" x 3/8" (16 x 10 mm)	5/8" x 3/8" (16 x 10 mm)
MSRP	\$139.95	\$149.95	\$164.95

Our new AIO features specific product updates:

- Our award winning Apogee XL will be replaced by the Apogee XL2
- Fully re-designed radiator/reservoir/pump combo with a full size 100% acrylic resevoir
- Non plasticiting Mayhem Ultra Clear Tubing
- Addressable RGB LED's on the water block, reservoir, and radiator accent piece
- ALED PWM splitter (4 fan ports + 3 RGB ALED ports + Addressable RGB LED technology with 1 button control)
- 3x bottles of dyes included so users can customize their color experience

H220 X² Prestige



H240 X² Prestige



H320 X² Prestige



Drive X2 Prestige Series - Technical Specifications

		Radiator	
Material	Brass Tubes, Copper Fins	Brass Tubes, Copper Fins	Brass Tubes, Copper Fins
Body dimensions	127mm x 254mm x 28mm	140mm x 293mm x 28mm	127mm x 375mm x 28mm
Fill-port thread	G1/4	G1/4	G1/4
		eloop™ Fan	
Dimensions	120mm x 120mm x 25mm	140mm x 140mm x 29mm	120mm x 120mm x 25mm
Speed	PWM adjst. 800~2000 RPM	PWM adjst. 500~1800 RPM	PWM adjst. 800~2000 RPM
Airflow	57.3 ~ < 132.4 m³/h	< 123 m³/h	57.3 ~ < 132.4 m³/h
Static pressure	0.58 ~ 2.24 mmH ₂ O	< 2.35 mmH ₂ O	0.58 ~ 2.24 mmH ₂ O
Noise level	7.83 ~ < 28.4 dB/A	< 36.4 dB/A	7.83 ~ < 28.4 dB/A
Nominal voltage	12 VDC	12 VDC	12 VDC
Power input	1.9W	< 3.6 W	1.9 W
Connector	4-Pin	4-Pin	4-Pin
		Pump	
Speed	PWM adjst. 1200~3000 RPM	PWM adjst. 1200~3000 RPM	PWM adjst. 1200~3000 RPM
Nominal voltage	12 VDC	12 VDC	12 VDC
Power input	6 W	6 W	6 W
Max. static pressure	2.8 mH ₂ O	3.98 mH ₂ O	2.8 mH ₂ O
Max. discharge	11 l/min	2.9 l/min	11 l/min
Connector	SATA	SATA	SATA
MTBF	60,000 Hours	60,000 Hours	60,000 Hours
		Tubing	
Material	PVC	PVC	PVC
Dimensions	5/8" x 3/8" (16 x 10 mm)	5/8" x 3/8" (16 x 10 mm)	5/8" x 3/8" (16 x 10 mm)
MSRP	\$189.95	\$199.95	\$214.95

Our new Prestige version features even more advanced product updates:

- Noiseblocker eLoop fans instead of Helix fans
- Compression/Rotary Lok-Seal fittings throughout the kits

Unparalleled performance, innovation, and design.




The all new Apogee XL2 waterblock now features:

- Chrome plate base plate
- Redesigned housing, 100% acrylic to see the coolant and for a stronger lighting effect
- RGB ALED lighting to replace both the white LED lighting and colored strips
- A redesigned logo/cover plate that allows for better lighting effect and a wider view of the coolant/internals

Features and Benefits						
	Swiftech Drive X ² Series			Swiftech Drive X ² Prestige Series		
	H220 X ² 2x 120	H240 X ² 2x 140	H320 X ² 3x 120	H220 X ² Prestige 2x 120	H240 X ² Prestige 2x 140	H320 X ² Prestige 3x 120
MSRP	\$139.95	\$149.95	\$164.95	\$189.95	\$199.95	\$214.95
Performance	++			+++		
Noise Level	+++			++		
Compatibility Intel	Yes			Yes		
Compatibility AMD	Yes			Yes		
Overall Looks	++			+++		
Tubing	Ultra Clear			Ultra Clear		
Fittings	Barbed Rotaries			Compression Rotaries		
Reservoir	Full Size Clear Acrylic			Full Size Clear Acrylic		
Coolant	Propylene Glycol (Red, UV Blue and UV Green Dyes)			Propylene Glycol (Red, UV Blue and UV Green Dyes)		
Lighting	RGB ALED (WB, Rad., Res.)			RGB ALED (WB, Rad., Res.)		
Fans	Helix 120 PWM / 1850 RPM	Helix 140 PWM / 1850 RPM	Helix 120 PWM / 1850 RPM	NoiseBlocker eLoop 120 / 2000 RPM	NoiseBlocker eLoop 140 / 2000 RPM	NoiseBlocker eLoop 120 / 2000 RPM
Pump	Swiftech MCP30			Swiftech MCP30		
Control	PWM SPlitter w/ RGB Control + Optional Swiftech 3.5" Temperature and ALED Controller			PWM SPlitter w/ RGB Control + Optional Swiftech 3.5" Temperature and ALED Controller		

PERFORMANCE: X² PRESTIGE / X²

Intel 582K | @ 4,200 MHz | 1.385 V | 100% Load | Ambient Temp. 25 C

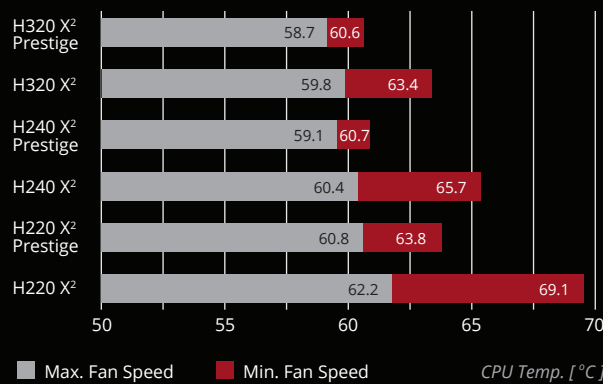

151 W. Victoria Street | Long Beach, CA 90805 | 1-888-85SWIFT (79438) | 310-763-0336 | www.swiftech.com

