

## MCP355™ Installation guide

### 1. General Use

The MCP355™ pump is a magnetically driven centrifugal pump featuring a 12 V DC brushless motor. It requires no maintenance when used with de-mineralized water and the appropriate anti-fungal additives. We recommend using 5% Swiftech's HydrX™ as an additive. The pump is designed to be connected to your computer power supply using the standard Molex 4 pin connectors.

The pump features a second wire equipped with a 3-pin connector designed to connect to a motherboard fan header, and to report the impeller rotational speed (RPM sensor).

The MCP355™ pump is not submersible.

### 2. Physical installation

- ❑ Determine the best location for your pump by observing how the tubing will be routed to the rest of the circuit. Sharp bends in the tubing should always be avoided to prevent kinks, which will reduce or completely prevent flow of the cooling fluid.
- ❑ In general, we recommend installation of the pump at the bottom of the chassis.
- ❑ The base of the pump features a soft neoprene pad coated with strong adhesive material. Once an appropriate location for the pump has been determined, simply peel-off the pad's protective paper, and press the pump against the chassis surface. The surface should be clean, and non greasy. Screws & grommets are also provided for permanent installation, and require drilling holes in the chassis (see permanent installation page 2).


### 3. Pump operating precautions:

**The MCP355™ pump should never be run dry, even for a quick test.**

You should always prime the pump with fluid before you start operating it (see warranty note \*). **With filled lines, turn the inlet/outlets upward to ensure there is no air bubble in the impeller.**

**Use of coloring die or fluorescent additives** containing particulate fillers will cause excessive wear to the pump's impeller bearing (see warranty note \*\*).


**Do not utilize small diameter or flow restrictive fittings in the pump inlet line. Minimum line inner diameter is 3/8".** An example would be a reservoir with 1/4" fittings. This may cause the pump impeller to cavitate, lose prime, stop pumping and damage the pump (see warranty note \*\*\*).

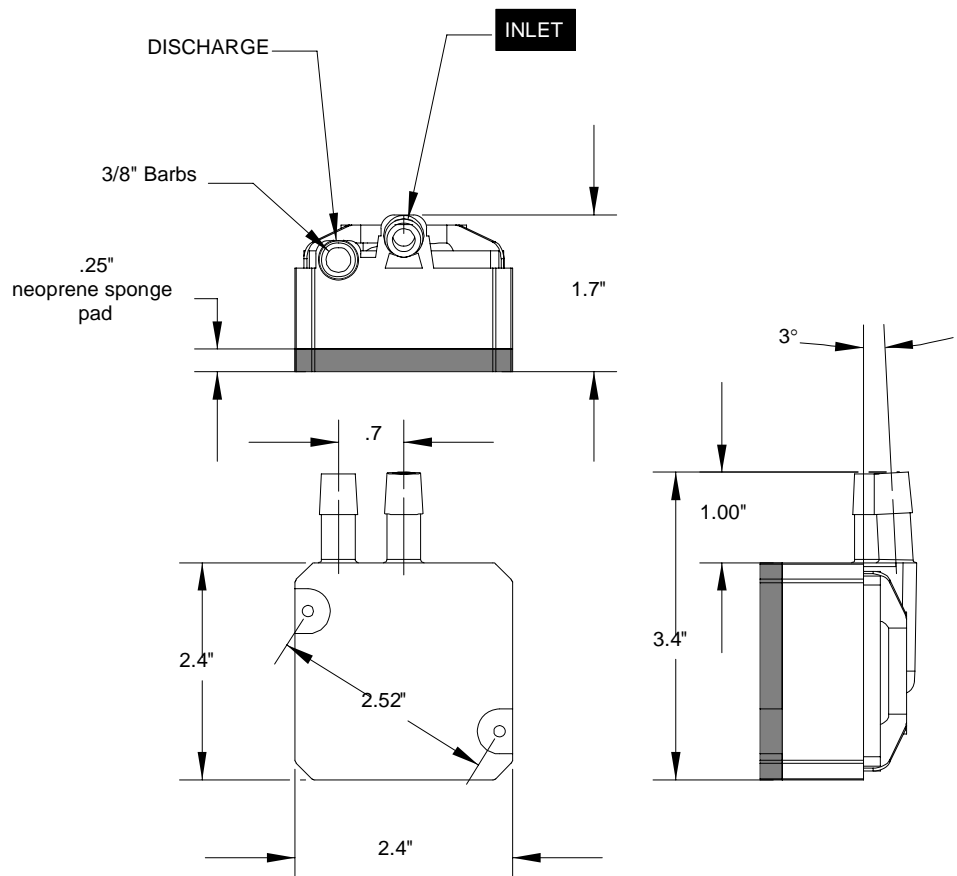

**Connecting the pump to the circuit:**

The pump's inlet and outlet are 3/8" in outside diameter. Use with 3/8" ID (1/2" OD) tubing, or 10mm ID (12mm OD) for Europe.



**4. Performance & Specifications**

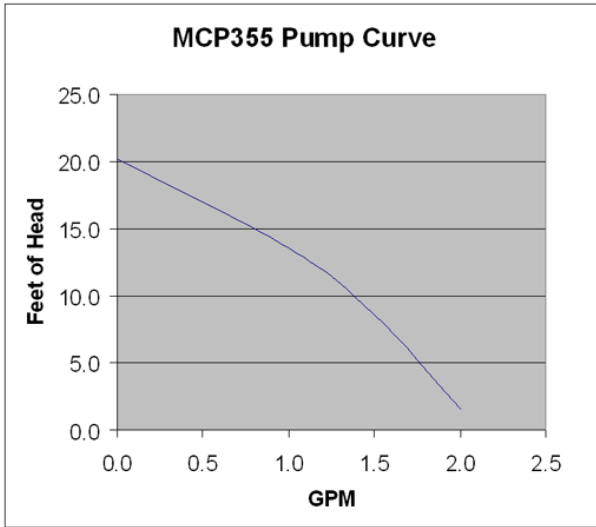

Nominal voltage	12 V DC
Operating voltage range	8 to 13.2 VDC
Minimum starting voltage	9 V DC
Nominal power (@ 12 V)	18 W
Nominal current@ 12v	1.46 amps
Nominal discharge @ 12v	~120 GPH (454 LPH)
Nominal head @ 12 v	20.2 ft (6.1mm)
Connection size	3/8" barbs (10mm)
Maximum pressure	22 PSI (1.5 BAR)
Temperature range	Up to 140°F (60°C)
Electrical connector	Molex 4 pin
Weight	7.3 oz (207 gr.)
Our noise measurement (non lab environment)	30 ~ 32 dBA in a quiet room @ 2'
Motor type	Electronically commutated, brushless DC, spherical motor
MTBF (Mean Time between failures)	50,000 hours

**5. Permanent installation to the chassis, and exploded view**

Drill two 0.312" (8mm) holes into panel, 2.52" (64mm) apart. Snap grommet into each hole. Tighten the provided screws until the pump neoprene pad is slightly and evenly compressed by approximately 1/8" (2~3mm) or less.

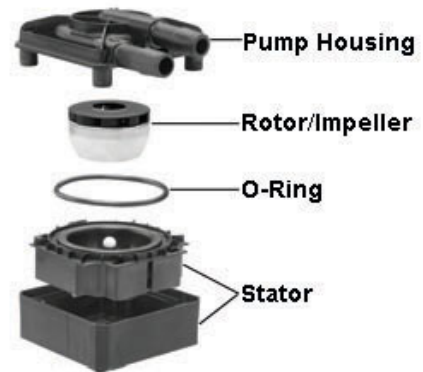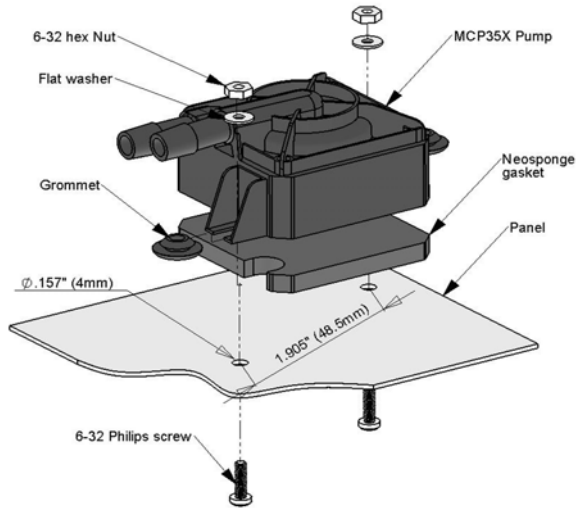

**DISCLAIMER:** Swiftech assumes no liability whatsoever, expressed or implied, for the use of this product, and more specifically for any, and all damages caused by the use of this product to any other devices in a personal computer, whether due to product failure, leak, electrical shorts, and or electro-magnetic emissions.

**WARRANTY:** This product is guaranteed for a period of **24 months** from date of purchase for defects in material, and workmanship. Guarantee consists of replacing defective parts with new or reconditioned parts. Guarantee is considered void in case of **improper use** **(\*)(\*\*)(\*\*\*),** handling or negligence on the part of user. Original invoice showing date and place of purchase is required for exercise of the warranty. **(\*) WARNING: DO NOT ATTEMPT TO RUN THIS PUMP DRY. THIS WILL CAUSE IMMEDIATE AND PERMANENT DAMAGE TO THE PUMP. (\*\*)** **EXCESSIVE WEAR DUE TO INAPPROPRIATE FLUIDS. (\*\*\*) EXCESSIVE RESTRICTION TO THE PUMP'S INLET**